


Unwinder 550

Accurate and reliable roll feeding



- ✓ **Center-shaft driven**
- ✓ **Compatible with pressure sensitive labels**
- ✓ **Easy to use splice station**
- ✓ **Feed directly into printers or inserters**

Service Area

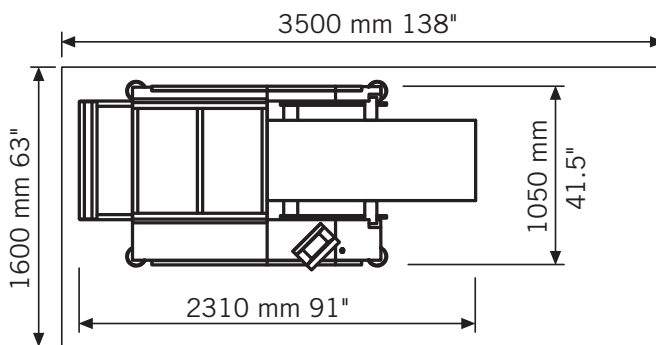

Technical Specifications

Performance / Media

Speed max.	600 ft/min	180 m/min
Feeding	Pinfed or pinless	
Paper weight	10.5# bond - 140# index, 40 - 250 gsm <i>(above 200 gsm with heavy paper kit and subject to application review)</i>	
Roll diameter	4" - 52"	100 mm - 1320 mm
Roll weight max.	1389 lb	630 kg
Web width	6" - 20.5"	155 mm - 520 mm
Core sizes	3", 5", 6"	70, 150, 200 mm

Options

Low speed kit	For use with low speed printers 20 - 100 ft/min 0.1 - 0.5 m/s	
Splice sensor	To detect splice in paper roll	
Fan kit	To control paper loop	

Electrical

Power	10A, 200 - 240 VAC, 50/60 Hz or <i>(North America)</i> 15A, 1 Phase, 208 V, REC=L6-15R	
Consumption	500 W (in use)	120 W (idle)
Heat output	360 kcal/h - 1100 kJ/h - 1030 BTU/h	

Environmental

Temperature	60 - 80° F	15 - 27° C
Acoustics	65 dB(A)	
Humidity	40 - 60%	

Dimensions

Length inc loop	56" (71.3")	1420 mm (1810mm)
inc loop and max roll	91"	2310 mm
Width	44.9"	1140 mm
Height excl. display	42.75" (49.8")	1085 mm (1265mm)
Weight	1587 lb	720 kg
Color	Gray	

Approvals

CE (2006/42/EC), EMC Class A, LVD,
CB EN 60950, cULus 60950-1,
FCC15 Class A

Product Specifications

